


Go Green Lighting, LLC

301-880-0549

gogreenwithak@gmail.com

Picture	Item	Spec.	Curve	Beam pattern	Comparison	Feature
	AOK-104-28W	check here	check here	check here	check here	check here

Remark

- Price: \$ 320.00 under 50 bulbs and \$280.00 for over 50 bulbs.
- Payment Terms: T/T WESTERN UNION or L/C if the funds is large
- Sample Delivery time: About 7 days after received the down payment
- Delivery: 7-15 days after order confirmed
- Valid Period: one month
- MOQ: 5PCS
- Quality warranty: 10 years

Office 301 880 0549

www.gogreenlightingLED.com



Go Green Lighting, LLC

301-880-0549

gogreenwithak@gmail.com

Model Number	AOK-104-28W
Input Voltage	85-265VAC
Frequency Range	47 ~ 63 Hz
Power Factor(PF)	> 0.9
Total Harmonic Distortion (THD)	< 20%
Power Efficiency	83%
Working Voltage	85-264VAC, 12 or 24VAC/DC
LED Consumption	28 W
Power Supply Consumption	7 W
LED Luminous Efficiency	≥90 lm/w
LED Initial Flux?	2,500 lm (Tj=25°C)
LED Maintain Flux	2,300 lm (Tj=70°C,Ta=25°C)
Lamp Output Flux	2,100 lm (Tj=70°C,Ta=25°C)
Lamp's Efficiency (%)	>90 %
Illumination (E)	(Height=6 m)≥13 lux (Equal to HPS 33 lux) (Height=8 m) ≥7.5 lux (Equal to HPS 19 lux) (Height=10 m)≥4.5 lux (Equal to HPS 11 lux) (Height=12 m)≥3 lux (Equal to HPS 7.5 lux)
Effective Illuminated Area	20×8 m (Height=6 m) 26×10 m (Height=8 m) 33×13 m (Height=10 m) 40×16 m (Height=12 m)
Color Temperature	Pure White: 5,000 ~ 7,000 K, White White:3,000 ~ 4,000K
Color Index(CRI)	Ra > 75
Light Source	High Power 1 Watt LED
Light Distribution Curve / Beam Pattern	Asymmetric (Bat Wing) / Rectangular Beam

The Highest Light Intensity Angle	The Horizontal Axis: 110° , The Vertical Axis: 45°
Beam Angle	The Horizontal Axis: 120° , The Vertical Axis: 60°
Junction Temperature (Tj)	70 ° C ± 1 0% (Ta= 25 ° C)
System Resistance (Rja)	1.4 ° C / W
Working Temperature	- 30 ° C ~ 40 ° C
Working Humidity	10 % ~ 90 % RH
Storage Temperature	10 ° C ~ 85 ° C
Working Life	> 50,000 Hrs
Light Body & Lampshade Material	Aluminum Alloy and PC
Lamp Base	E40
The Dimensions(Units : mm)	∅ 90x275 mm
Net Weight (g)	1 kg
IP Rating	IP 60
Packing	1 pc/White Box, 10 pcs/Carton
Carton Size	690 x 330 x 315 mm
Container Q'ty (pcs)	20'Q: 3,570 pcs 40'Q: 7,350 pcs, 40'HQ: 8,400 pcs

Go Green Lighting, LLC


301-880-0549

gogreenwithak@gmail.com


Bat-wing beam pattern of the distribution curve, also can be changed by different section's demand. Rationally control the distribution to be a rectangular beam pattern. When the installation height=12m, the beam pattern is 40x16m rectangular , and the radiation-efficiency is more than 70% in the effective region, the total transparence is more than 90%, the greatest extent possible to reduce the loss of light, the LED light has been fully utilized. The illumination uniformity is very good in the effective radiation region, even better than 0.5, higher than the highest grades of 0.4 of the state road's standards. The edge of the beam pattern is very clear and slide, no adverse glare out of the effective radiation region, will not cause any light pollution, it is an idea cut-lighting lamp. Satisfy the requirements of the road lighting or other special lighting, which can be widely used in the special requirements such as street lighting, advertising lighting, etc.; it is a green, energy-saving, environmentally friendly lighting product.



◆ Light Distribution Curve

① Lamp's Plane Installation

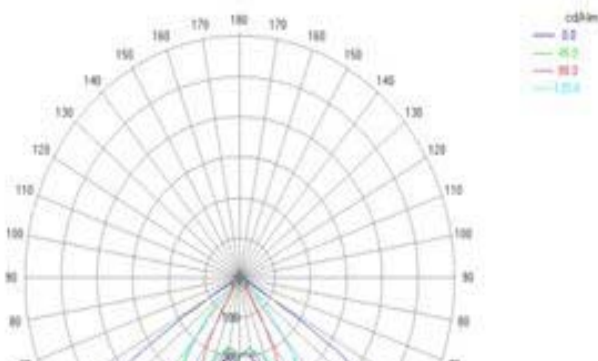

② Lamp's Inclined Installation

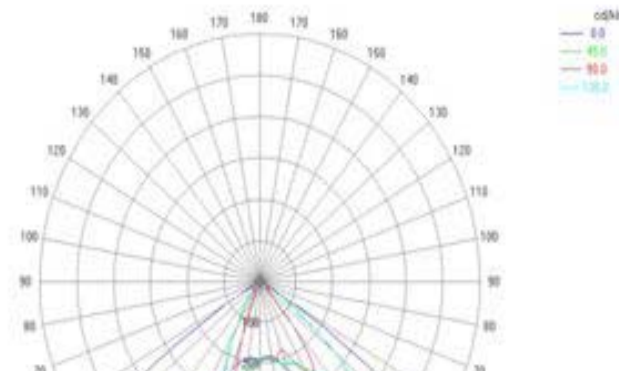

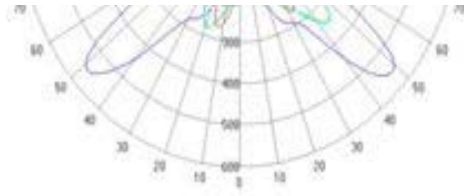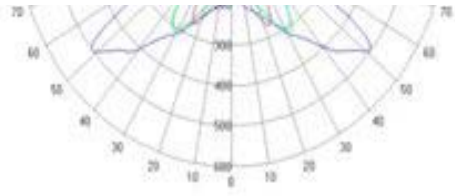



Go Green Lighting, LLC

301-880-0549

gogreenwithak@gmail.com

The Beam Pattern is rectangular (rectangle), good illumination uniformity, brightness difference is very little between the spot of center and periphery. Almost no difference in the direction of extending the road completely with the continuous extension of the road, it is the ideal lighting lamps for road lighting.

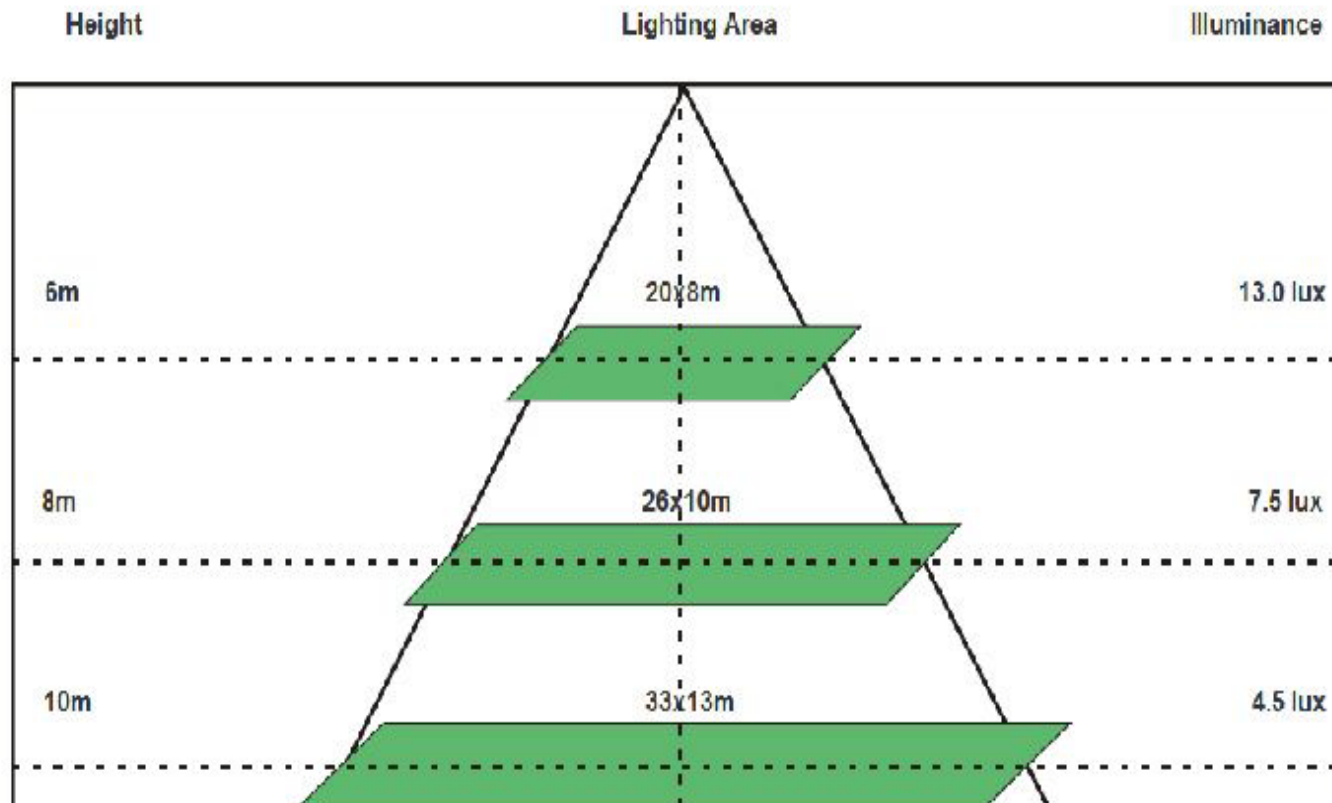

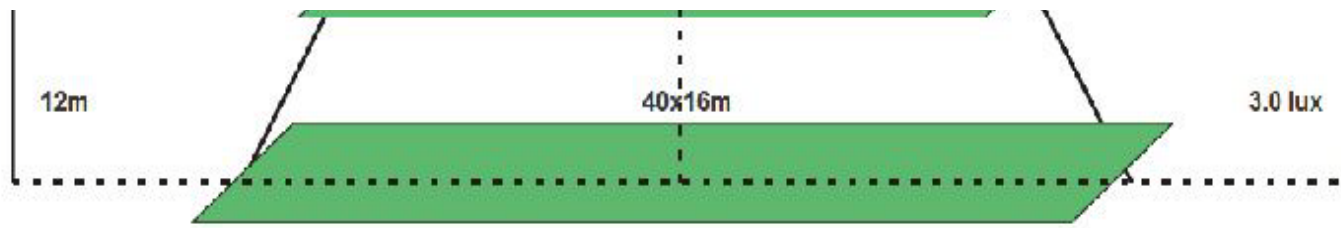

Go Green Lighting, LLC

301-880-0549

gogreenwithak@gmail.com

Items	High Pressure Sodium	AOK LED Street Light
Photometric Performance	Bad	Excellent
Radiator Performance	Bad	Excellent
Electric Performance	Electric Shock Easy(High Voltage)	Safe (Low Voltage)
Working Life	Short (5,000h)	Quite Long (> 50,000h)
Working Voltage Range	Narrow ($\pm 7\%$)	Wide($\pm 20\%$)
Power Consumption	Quite High	Quite Low
Startup Speed	Quite Slow(Over 10minutes)	Rapid (2s)
Strobe	Yes(Alternating Current Drive)	No(Direct Current Drive)
Optical Efficiency	Low	High
Color Index/ Distinguish Feature	Bad, Ra< 50(The Color Of Object Is Faith, Boring, Hypnosis)	Good, Ra>75(The Color Of Object Is Fresh, Veritable And Comfortable)
Color Temperature	Quite Low (Yellow Or Amber , Uncomfortable)	Ideal Color Temperature (Comfortable)
Bad Glare	Strong Glare (Dazzle)	No Harmful Glare
Light Pollution	Strong	No
Heating	Serious (>300°C)	Cold Light (<60°C)
Lampshade Turn Dark	Easy (Absorb Dust)	No (Static Proof)
Lamp Aging Turn Yellow	In A Short Time	No
Shockproof Performance	Bad(Fragile)	Good (No Filament Nor Glass)
Environment Pollution	Contains Lead Element Etc.	No
Maintenance Cost	High	Quite Low

Product Cubage	Big	Small (Slim Appearance)
Product Weight	Heavy	Light
Cost-Effective	Low	High
Integrated Performance	Bad	Excellent

Go Green Lighting, LLC

301-880-0549

gogreenwithak@gmail.com

- 1 Revolutionary Photometric Design - The world's first dedicated optical system (rectangular beam focusing lens). Reasonable control of the light distribution, spot rectangular beam pattern, and ensure an ideal uniformity of brightness on the road surface;
- 2 Unique Integrated Lens and Lampshade Design - Array Lens play a protective and spot light role, avoid wasteful duplication of light and reduce the loss of light, also reduce the weight of the product and enable simplified structure;
- 3 Creative Design of the Radiator and Lampholder Integration - Fully protect LED life and heat dissipation requirements, satisfied with the structure and design of LED Lights fundamentally, with the most distinctive features of LED Lights(see attached picture);
- 4 Standard E40, 360-degree Rotation Lamp Holder - It can still rotate after full tightening the lamp holder arbitrarily, adjust to ensure the best direction face to the ground;
- 5 Direct Replacement Light Source Design - Direct replace the existing high-pressure mercury lamp, high pressure sodium lamp, metal halide lamps, no need to change the original lamp shell;
- 6 Intelligent Current Control - Intelligent current control, whatever any deviant situation, it is able to achieve the precision constant current, ensure the LED can work under the secure current;
- 7 No Adverse Glare - Eliminate the glare caused by the adverse ordinary lights glare and visual fatigue sight interference, improve driving safety, reduce the incidence of traffic accidents, fully embodies the spirit of "People-oriented Technology" in this product;
- 8 No Light Pollution - Light Distribution designed for road lighting, in addition to illuminate the path and will not illuminate the road outside the region. Eliminate the interference signal by the residents of the light into the rest room;
- 9 No High-voltage, No Dust Adsorption - Eliminate the high-voltage adsorb the dust cause the lampshade become dark, reduce the brightness;
- 10 No High-temperature, No Aging Yellow Lampshade - Eliminate baking the traditional lampshade which cause aging yellow, shortened life expectancy and decrease the brightness;
- 11 Wide Working Voltage – The brightness and working life will be reduced if the working voltage change more than 7% for the traditional streetlight, but it will not influence our LED Streetlight at all;
- 12 Start Without Delay - Reach the normal brightness and do not have to wait when switch on,

eliminate a long process of starting of the traditional street lights;

- 13 No Strobe - Eliminate the visual fatigue which caused by the strobe lights of the traditional street lamps;
- 14 Impact Resistance, Shock-proof, Without Ultraviolet (UV) and Infrared (IR) Radiation - No filament and glass frames, avoid break of the traditional lamp, without harm to the human body;
- 15 High Color Index, Nice Coloration - To show the true colors and more brighter;
- 16 Multiple Color Temperature Options - Color temperature to meet the needs of different occasions, eliminated the low color temperature of the sodium lamp which cause the hypnotic mood and high color temperature of the mercury lamp which cause the depressed mood, observers will feel more comfortable;
- 17 Tremendous Energy Saving - Used the ultra high power, high brightness LED light source, together with the high power efficiency power supply, which can save energy 50%-80% than the conventional sodium and mercury lamps;
- 18 Long Life, Up To 50,000 Hours - (Working for 10 hours a day, can be used for more than 13 years), is 5-10 times working life than a traditional sodium or mercury lamp;
- 19 Green and Environmental Protection - no lead, no mercury, no environmental pollution;
- 20 Universal Input Voltage - 85-264VAC full voltage range constant, constant-current PWM technology, high efficiency, low-heat, high-precision constant current;
- 21 No Pollution to Power Network - Power factor ≥ 0.9 , THD $\leq 20\%$, EMI apply with the global universal index, reduce the power loss and transmission lines to avoid contamination of the network of high frequency interference;
- 22 Work Under Low-voltage and Low-Heat, Safe and Reliable - LED junction temperature can be controlLED under an ideal temperature ($T_J < 70^\circ\text{C}$ $T_a = 25^\circ\text{C}$ ambient temperature);
- 23 Perfect Combination With Solar Energy - Fully exert the advantage of the LED work under low voltage and environmental work, according to the local solar energy resources, electricity and solar power can also be combined. To achieve the best cost performance and high reliability customers;
- 24 High Luminous Efficiency - LED luminous efficiency of the existing conditions is $\geq 85\text{lm/w}$, with the rapid increase LED brightness, when the luminous efficiency reach 150lm/w , the 400W sodium lamp will be replace by the 100W LED lamp,? the luminous efficiency will? reach 300lm/w eventually;
- 25 Have a number of patents for inventions and utility model patents.